

## USER GUIDE FOR LED FOLLOW SPOT (AUTO ZOOM)



Application Mode:

LED FOLLOW SPOT (AUTO ZOOM) - 150W/330W/400W

Leksa Lighting® all rights reserved, Information, Specifications, Images and Instructions given in the document herein subject to change without further notice. Leksa Lighting Logo, Data and Indicated product names, Model no's herein the trade mark of Leksa Lighting.

You may connect to below contact for your queries:

- 📍 Leksa Lighting Technologies Pvt. Ltd
- 📍 Ashwathpura Road, Mangalore – 574227, India
- ✉ [biz@leksalighting.com](mailto:biz@leksalighting.com)
- 🌐 [www.leksalighting.com](http://www.leksalighting.com)
- 📞 +91-7899 – 543210

For Quality and Service support reach us @ [quality@leksalighting.com](mailto:quality@leksalighting.com)

### **Important Notice:**

There are no user serviceable parts inside the fixture. Do not attempt any repairs yourself; doing so will cease the manufacturing warranty and such acts will void the manufacturer warranty claims.


- Warranty claims to be reported to the above referred email ID's with the product Sl. Nos.
- Warranty will not be extended on the glass and breakable items like lenses etc.
- Product warranty does not cover the physical damages, breakages etc.
- Product warranty ceases if the product is not used as per manufacturer instructions.
- Product warranty is limited to the functional aspects of the fixture.
- Repair or Replacement is depending on the variance of complaint subject to manufacturer decision.

**Instructions:**


This Product is IP20 rated. For proper operation, follow the **Installation guidelines described in this manual. Only qualified and certified personnel** should perform the installation and only the original rigging parts (brackets, holders, clamps, safety cables) included with this fixture should be used for installation. Any modifications will void the original manufacturer's warranty and increase the risk of damage and/or personal injury.

- Never look directly into the light source to prevent risk of injury to your retina, which may induce blindness. Those suffering from EPILEPSY should avoid looking directly into the light source of this unit at all times.
- The fan and air inlets must remain clean and never blocked. Allow approx. 6" (15cm) between this fixture and other devices or a wall for proper cooling.
- Always disconnect from main power source before performing any type of service and/or cleaning procedure. Only handle the power cord by the plug end, never pull by tugging the wire portion of the cord.
- Do NOT operate fixture if the power cord has become frayed, crimped and/or damaged. If the power cord is damaged, replace it immediately with a new one of similar power rating.
- Do NOT operate fixture near any flammable materials.
- Do NOT operate fixture in dusty environments.
- Fixture is IP20 rated and should be operated at the dry spaces. Fixture may get damaged to moisture and wet environments.
- This fixture has an inbuilt signal dimming system. Do NOT connect this fixture for external dimmer packs.
- We urge you to ensure proper mechanical fittings of clamps and a usage of safety chains while suspending from the top.


**FIXTURE OVERVIEW:**

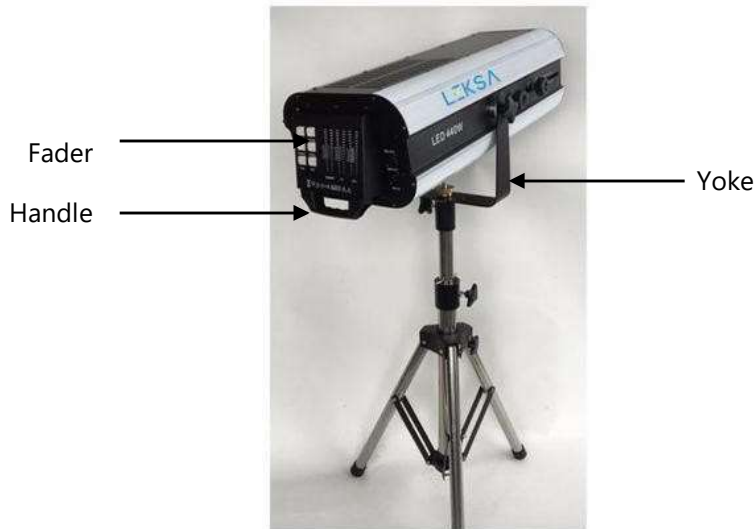

DMX Input  
5 Pin & 3 Pin XLR Socket

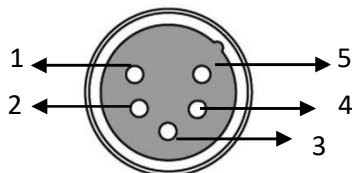

DMX Output  
5 Pin & 3 Pin XLR Socket

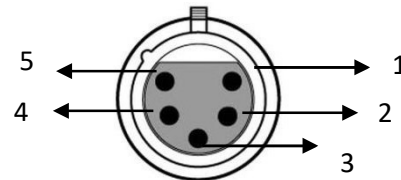

1	Ground	2	Data -	3	Data +
4	Open	5	Open		

**Note:**

- DMX 512 Signal looping can be done from one fixture to other.
- Maximum 25 to 30 Fixtures can be taken in a single loop provided the distance is within short range.
- No Y Split is allowed for DMX looping.
- DMX last open end to be terminated with a 120 Ohm Resistor termination plug
- If there is no DMX signal input, auto color change mode will activate automatically

**FIXTURE DETAILS:**

Type of Fixture	:	LED FOLLOW SPOT LIGHT
Lamp Source	:	Light Emitting Diode (LED)
Power Consumptions	:	150W/330W/400W
Control Modes	:	Manual Dimming/DMX Dimming
Chord	:	Neutrik Power In & Loop
DMX Interface	:	5 Pin (Standard), 3 Pin (Custom)Zoom
Beam angle	:	1° ~ 9°
Linear dimming	:	Linear Dimming 0 ~ 100% through Fader control panelAvailable
Color temperatures	:	7500K, 6500K, 4500K, 3200K
Projection Distance	:	100M
Housing	:	Steel & Aluminum Powder coated casing
IP Rating	:	IP20
Dimensions	;	650 x 310 x 270 mm
Net Weight	:	15 Kgs

**Note:**

- Do NOT open the fixture for any kind of repair. There are parts which can be operated by authorized personnel's only.
- For Further assistance, you are requested to contact our office or authorized dealers.We are there at your service.

Thank You for Choosing Leksa Lighting:

Leksa Lighting Technologies Pvt. Ltd.  
Ashwathapura Road, Moodbidri,  
Mangalore – 574227, India  
[www.leksalighting.com](http://www.leksalighting.com)  
[biz@leksalighting.com](mailto:biz@leksalighting.com)  
+91-7899 543210