

Product Model No. : LK PARCAN 100 D
Product Description : 100W LED Parcan Light

100W Zoomable PARCAN

100W LED Source with Parcan replacing conventional Halogen pars with added zooming feature with variable beam angle from 11 ~ 35 Degree also providing excellent advantage of low power consumption, no heat and high quality output. Light is ideal to lit Auditorium Stages, Church Stage, Event Stage, Discotheque, Anchor illumination needs and multipurpose venues.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 110W
- Input Voltage AC 100V ~ 260V, 50Hz

Optical Arrangement:

- Beam Angle 11° to 35°
- Manual movable Zoom Lens

Lamp Source:

- LED COB Based Source
- 5600K, 1 x 100W Chip on Board
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- R9 Value 90+
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 455x 290x 360mm
- Weight 4.4 Kgs/ 9.6 lbs
- DmX 3/5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- Single or Dual Yoke Mount
- Aluminium Body with Black Powder coated finish
- LED Easy View Display

Control:

- DmX 512 Through 5 Pin XLR
- Manual Mode Operation through keys
- 3 Channel DmX Control





Others:

- Working Temperature +45° ~ -30°
- Strobe option Adjustable 1~25 times/Sec Variable
- 11.7KHz Refresh Rate



Stage Effect Illumination


100W LED ZOOMABLE PARCAN – 5600K

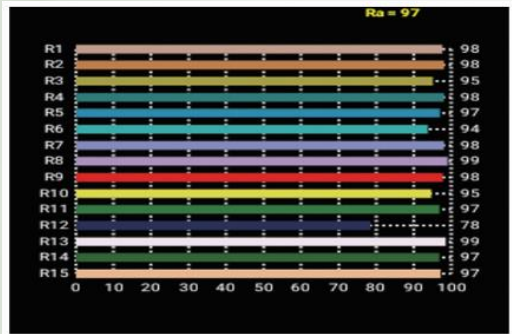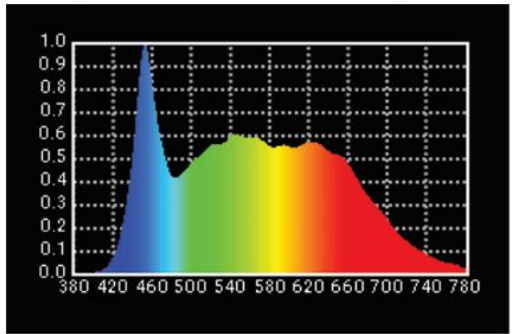

Features

<p>Lamp Source</p> <p>LED COB 100W</p>	<p>CC Temp.</p> <p>5600K</p>	<p>Beam Angle</p> <p>11° ~ 35°</p>	<p>DMX Channels</p> <p>3 CH</p>
<p>Power</p> <p>110W</p>	<p>Control</p> <p>DMX 512</p>	<p>Power/DMX</p> <p>In Out</p>	<p>CRI Value</p> <p>95+</p>

Photometry Readings

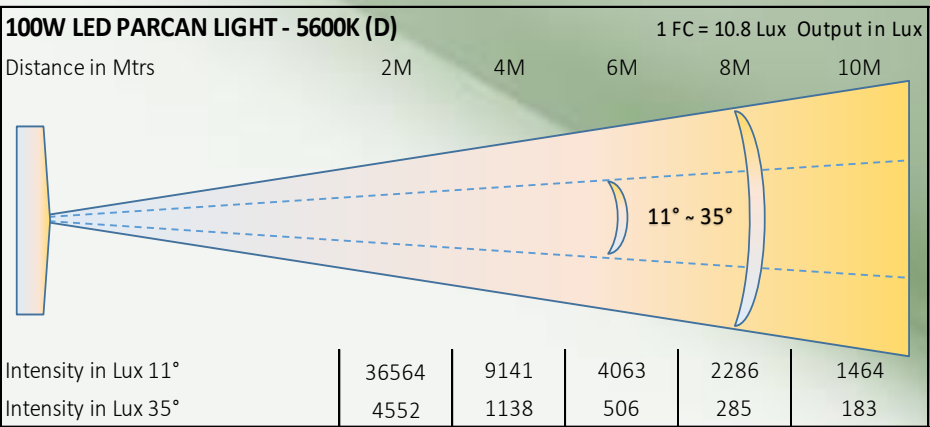

- Available Models:**
- LK PARCAN 100 T/D
 - LK PARCAN 120 RGBW
 - LK PARCAN 150 T/D
 - LK PARCAN 200 T/D

Fixture Images

