

**Product Model No.** : LK PARCAN 150 D  
**Product Description** : 150W LED Parcan Light

### 150W Zoomable PARCAN

150W LED Source with Parcan replacing conventional Halogen pars with added zooming feature with variable beam angle from 11 ~ 35 Degree also providing excellent advantage of low power consumption, no heat and high quality output. Light is ideal to lit Auditorium Stages, Church Stage, Event Stage, Discotheque, Anchor illumination needs and multipurpose venues.

Accessories: Safety Chain, C Clamp



#### Technical Specifications:

##### Electrical & Power:

- Power Consumption 160W
- Input Voltage AC 100V ~ 260V, 50Hz

##### Optical Arrangement:

- Beam Angle 11° to 35°
- Manual movable Zoom Lens

##### Lamp Source:

- LED COB Based Source
- 5600K, 1 x 150W Chip on Board
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- R9 Value 90+
- 50,000 Hours Burning life

##### Physical & Construction:

- Dimension 455x 290x 360mm
- Weight 4.8 Kgs/ 10.46 lbs
- DmX 3/5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- Single or Dual Yoke Mount
- Aluminium Body with Black Powder coated finish
- LED Easy View Display s

##### Control:

- DmX 512 Through 5 Pin XLR
- Manual Mode Operation through keys
- 3 Channel DmX Control





##### Others:

- Working Temperature +45° ~ -30°
- Strobe option Adjustable 1~25 times/Sec Variable
- 11.7KHz Refresh Rate



### Stage Effect Illumination


## 150W LED ZOOMABLE PARCAN – 5600K

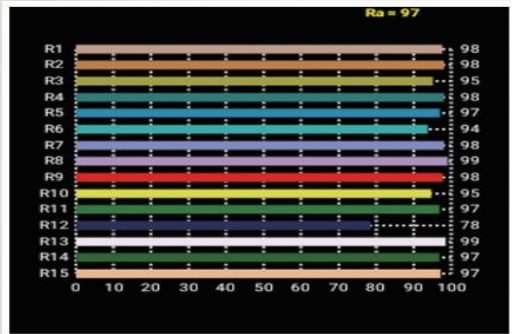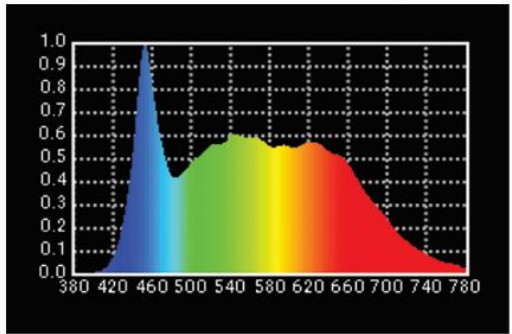

### Features

<p>Lamp Source</p> <p>LED COB 150W</p>	<p>CC Temp.</p> <p>5600K</p>	<p>Beam Angle</p> <p>11° ~ 35°</p>	<p>DMX Channels</p> <p>3 CH</p>
<p>Power</p> <p>160W</p>	<p>Control</p> <p>DMX 512</p>	<p>Power/DMX</p> <p>In Out</p>	<p>CRI Value</p> <p>95+</p>

### Photometry Readings

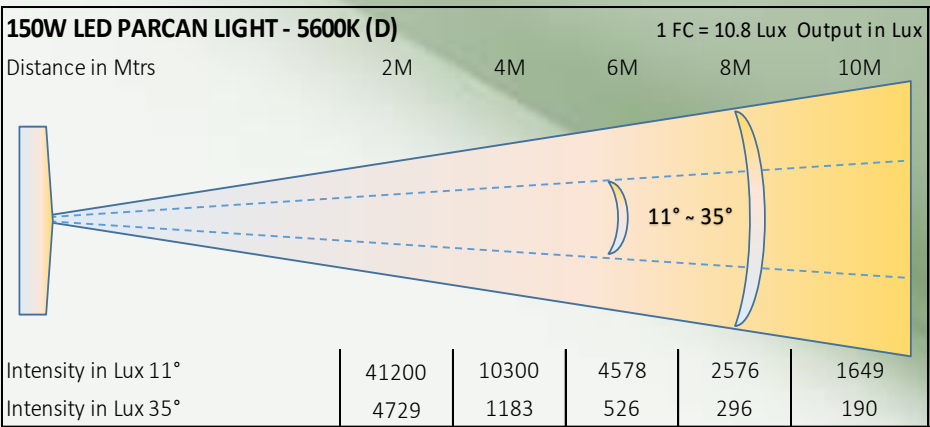

- Available Models:**
- LK PARCAN 100 T/D
  - LK PARCAN 150 T/D
  - LK PARCAN 200 T/D

### Fixture Images

