

Product Model No. : LK BLDR 2100 T/D
Product Description : 200W LED Blinder Light 2x100

LED BLINDER LIGHT – 200W

High bright uniform distributed 100W Each LED Source for illuminating the multipurpose venues, large audience, Auditorium Stages, DJ & Event Stages, Large photographic venues, Production Studios, Discotheques, Film & Band performances for providing flood lighting effect.

Accessories: Safety Chain, C Clamp



Technical Specifications:

Electrical & Power:

- Power Consumption 210W
- Input Voltage AC 100V ~ 240V, 50Hz

Optical Arrangement:

- Beam Angle 30°

Lamp Source:

- LED COB Based Source
- 3200K/5600K, 2 x 100W Chip on Board
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- R9 Value 90+
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 372x 127x 234mm
- Weight 3.5 Kgs/ 7.7 lbs
- DmX 3/5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- Single or Dual Yoke Mount
- MS Body with Black Powder coated finish
- LED Easy View Display

Control:

- DmX 512 Through 5 Pin XLR
- 2/6 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode







Others:

- Working Temperature +45° ~ -30°
- Strobe option Adjustable 1~25 times/Sec Variable
- 11.7KHz Refresh Rate



Stage Effect Illumination

200W LED BLINDER LIGHT



3200K

5600K

Features

Lamp Source




CC Temp.




3200K/5600K

Beam Angle



30°

DMX Channels



2/6 Ch

Power



210W

Control



DMX
512

Power/DMX




In
Out

CRI Value



95 +

Photometry Readings

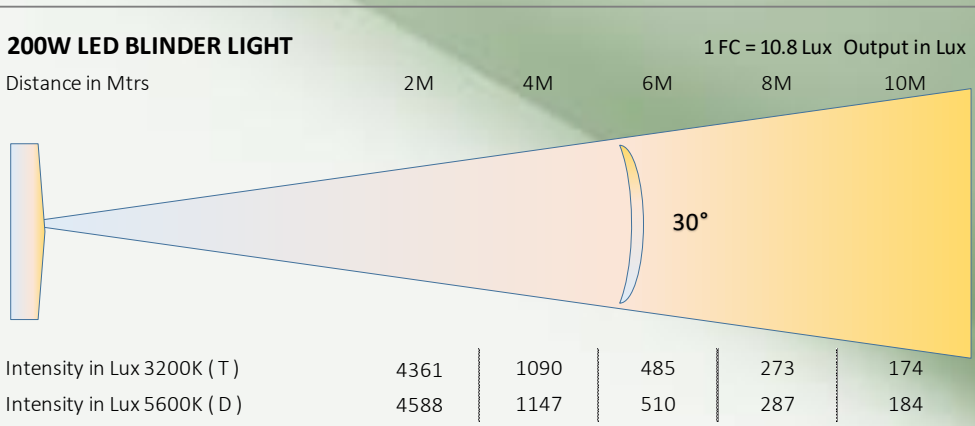


Available Models:

- LK BLDR 2100T
- LK BLDR 2100D

Fixture Images



View-1



View-2



View-3



View-4