

**Product Model No.** : LK BLDR 4100T/D  
**Product Description** : 400W LED Blinder Light 4x100

## LED BLINDER LIGHT – 400W

High bright uniform distributed 100W Each LED Source for illuminating the multipurpose venues, large audience, Auditorium Stages, DJ & Event Stages, Large photographic venues, Production Studios, Discotheques, Film & Band performances for providing flood lighting effect.

Accessories: Safety Chain, C Clamp



### Technical Specifications:

#### Electrical & Power:

- Power Consumption 410W
- Input Voltage AC 100V ~ 240V, 50Hz

#### Optical Arrangement:

- Beam Angle 30°

#### Lamp Source:

- LED COB Based Source
- 3200K/5600K, 4 x 100W Chip on Board
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- R9 Value 90+
- 50,000 Hours Burning life

#### Physical & Construction:

- Dimension 408x 127x 234mm
- Weight 5.0 Kgs/ 11.0 lbs
- DmX 3/5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Single or Dual Yoke Mount
- MS Body with Black Powder coated finish
- LED Easy View Display

#### Control:

- DmX 512 Through 5 Pin XLR
- 8 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode







#### Others:

- Working Temperature +45° ~ -30°
- Strobe option Adjustable 1~25 times/Sec Variable
- 11.7KHz Refresh Rate



### Stage Effect Illumination

### 400W LED BLINDER LIGHT



3200K

5600K

### Features


Lamp Source




CC Temp.



Beam Angle



DMX Channels



Power



Control




Power/DMX



CRI Value



### Photometry Readings

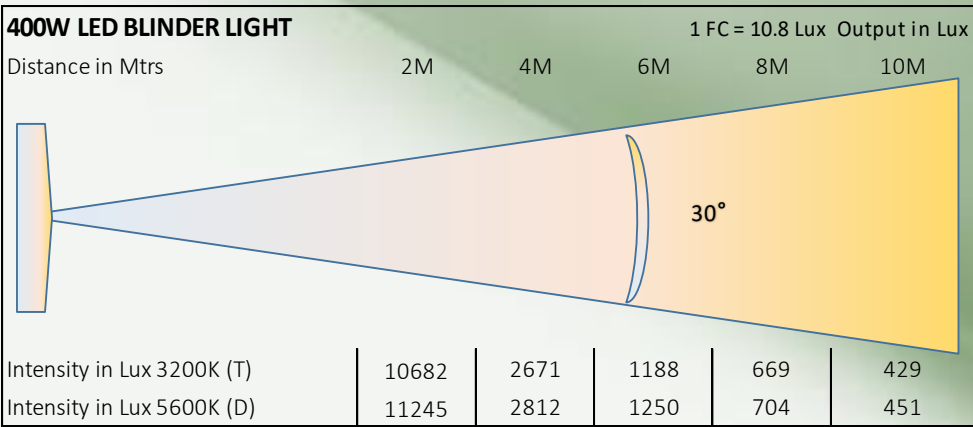


- Available Models:**
- LK BLDR 4100T
  - LK BLDR 4100D

### Fixture Images



View-1



View-2



View-3



View-4