

Product Model No. : LK P200 BC
Product Description : LED Lens Panel Bi Color 200W

LED LENS PANEL 200W

High quality LED Lens Panel light with Controlled beam spread of 35 Degree provided with high purity parameters like CRI, TLCI & R9 Values above 96, Studio quality dimming from 100% ~ 0% along with Manual, DmX and Standalone modes of operation. Light is ideal to be used for Tv Studios Chroma and Anchor lighting application, Photography use, Film, Fiction requirement and multipurpose requirements.



Accessories: Barndoor, Diffuser, POS Yoke, Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 210W
- Input Voltage AC 100V ~ 240V, 50Hz

Optical Arrangement:

- Beam Angle 35° Spread (Optional 60 Degree)
- Lens controlled Beam Angle 5x5 Array (PC Lens)

Lamp Source:

- LED SMD Lamp Source 5x5 Array
- CCT 3200K/5600K 450 x 0.5W Surface Mounted LED's
- Colour Rendering Index 98+
- Tel. Lighting Consistency Index 99+
- R9 Value 95+
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 600 x 330 x 140mm
- Weight 9.95 Kgs/ 21.93 lbs
- DmX 5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- Aluminium Body with Black Powder coated finish
- LCD Easy View Display
- Inbuilt Barndoor arrangement

Control:

- DmX 512 Through 5 Pin XLR
- Manual Mode Operation
- 2 Channel DmX Control
- Master Slave mode through keys / Pot







Others:

- Working Temperature +45° ~ -25°
- Passive Cooling System, No Fan
- Compatible for High Speed Photography 10K FPS
- Flicker Free & Green tone free



Tv Studio Lighting

200W LED LENS PANEL – Bi Color

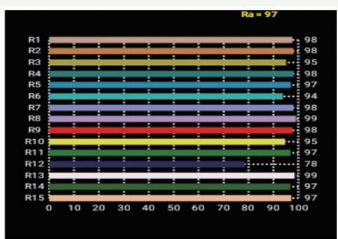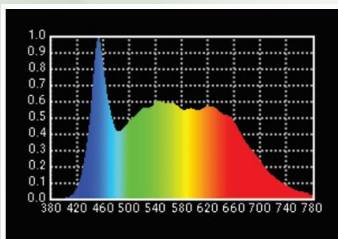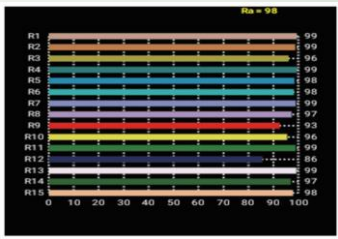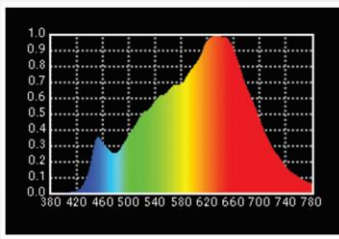

3200K

5600K

Features


Lamp Source




CC Temp.



Beam Angle



DMX Channels



Consumption



Control




Power Loop



CRI Value




Photometry Readings

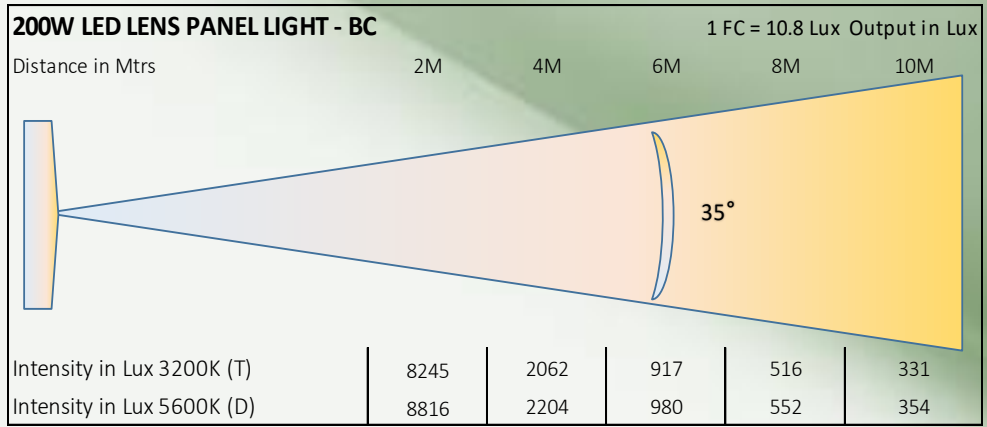

- Available Models:**
- LK P200 T (Tungsten)
 - LK P200 D (Daylight)
 - LK P200 BC (Bi Color)


Fixture Images



View-1



View-2



View-3



View-4