

Product Model No. : LK P300S BC

Product Description : LED Soft Panel Bi Color 300W

High quality LED Soft panel light with wide beam spread of 120 Degree provided with high purity parameters like CRI, TLCI & R9 Values above 96, Studio quality dimming from 100% ~ 0% along with Manual, DmX and Standalone modes of operation. Light is ideal to be used for Tv Studios Chroma and Anchor lighting application, Photography use, Film, Fiction requirement and multipurpose requirements.

Accessories: Barndoor, Diffuser, POS Yoke, Safety Chain, C Clamp

LED SOFT PANEL 300W



Technical Specifications:

Electrical & Power:

- Power Consumption 310W
- Input Voltage AC 100V ~ 240V, 50Hz

Optical Arrangement:

- Beam Angle 120° Spread
- · PMMA Milk White Diffuser

Lamp Source:

- LED SMD Lamp Source
- CCT 3200K ~ 5600K Variable
- 900 x 0.5W Surface Mounted LED's
- Colour Rendering Index 98+
- Tel. Lighting Consistency Index 99+
- R9 Value 95+
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 600 x 570 x 140mm
- Weight 13.2 Kgs/ 29.10 lbs
- DmX 5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- · Aluminium Body with Black Powder coated finish
- LCD Easy View Display
- Inbuilt Barndoor arrangement

Control:

- DmX 512 Through 5 Pin XLR
- Manual Mode Operation
- 2 Channel DmX Control
- Master Slave mode through keys / pot







Others:


- Working Temperature +45° ~ -25°
- · Passive Cooling System, No Fan
- Compatible for High Speed Photography 10K FPS
- · Flicker Free & Green tone free





Tv Studio Lighting




300W LED SOFT PANEL - Bi Color









3200K 5600K

Features



Power 310W



DMX 512

Control

Beam Angle
) o
120°

In

Power / DMX


DMX Channels



CRI Value



Photometry Readings

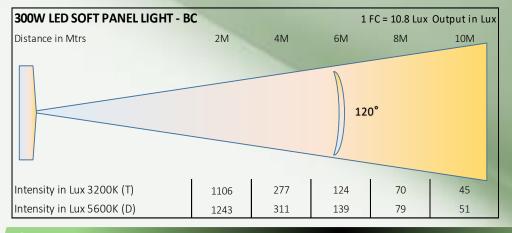

Available Models:

- LK P300S T (Tungsten)
- LK P300S D (Daylight)
- LK P300S BC (Bi Color)

Fixture Images

