

Product Code : LK MH 400BSW
Product Description : Moving Head Beam Spot Wash– 400W


400W LED Moving Head

High Bright Motorized LED Moving Head Beam Spot Wash light with excellent output and long distance throw used specially for all entertainment show needs. LED moving heads often come with various features such as color mixing, gobos, motorized zoom, strobe effects, and built-in programs for automated lighting sequences. LED moving heads can be controlled manually through DMX protocol using lighting consoles or software, allowing precise control over color, intensity, movement, and effects.



Lamp Source : 400W Chip On Board Daylight White LED
Electrical : AC 110-240V, 50/60HZ
Mode : 23 DMX Channels USITT DMX-512, Stand Alone, Test Mode & Master Slave

Technical Specifications:

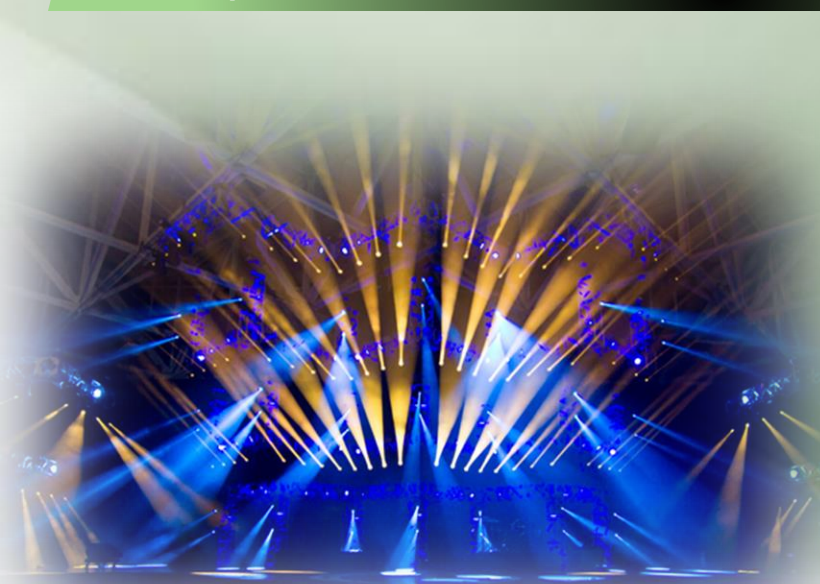

Optic:

- High Bright Daylight Open Colour
- Dimmer: Smooth dimmer from 0-100%
- Color: 8colors + white light.
- Fixed patterns: 12 fixed patterns + white light
- Rotating pattern: 7 glass patterns
- Standard 6 facet prism and 8 facet prism
- Linear CMY+CTO color mixing system
- Zoom Angle 4-35 °
- Working environment: -20 - 40 degrees

Other

- LCD display
- Key + touch dual operation mode
- Self-propelled mode
- Master-slave mode
- IP20 rated product
- Adopt axial fan to enhance cooling
- High temperature resistant plastic
- Body Dimension 380x 270x 650mm
- Net Weight 22.5Kgs

Motorized

- Pan/Tilt
- Pan movement range: 540°
- Tilt movement range: 270°
- Automatic Pan/Tilt position correction

400W Moving Head – DMX CHANNELS

CH 1 – Pan

CH 2 – Pan Fine

CH 3 - Tilt

CH 4 – Tilt Fine

CH 5 – P/T Speed

CH 6 – Dimmer

CH 7 - Strobe

CH 8 – Color

CH 9 – CTO

CH 10 – C

CH 11 –M

CH 12 – Y

CH 13 – Fixed Gobo

CH 14 – Zoom

CH 15 – Focus

CH 16 – ROT Gpbo

CH 17 – Gobo Rotating

CH 18 – Prism 1

CH 19 – Prism 1 ROT

CH 20 – Prism 2

CH 21 – Prism 2 ROT

CH 22 – Frost

CH 23 – Reset

Technical Specifications:

Electrical

- Power supply: Electronic auto-ranging
- Input voltage range: Supply 110-240V, 50/60Hz
- Rated Power : 500W
- Lumen illuminance: 5 meters 120,000 lm
- High-speed strobe: 0-30 times/sec

Operation

- Silent fans cooling
- Light source life: 20000 hours
- Stand-alone operation
- International standard DMX512. With RDM function



Available Models:

- LK MH 60S
- LK MH 150S
- LK MH 200S
- LK MH 350 BSW