

Product Model No. : LK P60S T/D
Product Description : LED Soft Panel 3200K / 5600K 60W

LED SOFT PANEL 60W

High quality LED Soft panel light with wide beam spread of 120 Degree provided with high purity parameters like CRI, TLCI & R9 Values above 95, Studio quality dimming from 100% ~ 0% along with Manual, DmX and Standalone modes of operation. Light is ideal to be used for Tv Studios Chroma and Anchor lighting application, Photography use, Film, Fiction requirement and multipurpose requirements.



Accessories: Fixed Barndoor, Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 65W
- Input Voltage AC 100V ~ 240V, 50Hz

Optical Arrangement:

- Beam Angle 120° Spread
- PMMA Milk White Diffuser

Lamp Source:

- LED SMD Lamp Source
- CCT 3200K/5600K 96 X 0.75 Surface Mounted LED's
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 270 x 270 x 110mm
- Weight 3.6 Kgs / 7.93 lbs
- DmX 5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- MS Body with Black Powder coated finish
- LCD Easy View Display
- Inbuilt Barndoor arrangement

Control:

- DmX 512 Through 5 Pin XLR
- Manual Mode Operation
- 1 Channel DmX Control
- Master slave mode through keys /pot




Others:

- Working Temperature +45° ~ -25°
- Passive Cooling Systems, No Fan
- Compatible for High Speed Photography 10K FPS
- Flicker Free & Green tone free





Tv Studio Lighting


60W LED SOFT PANEL – 3200K / 5600K

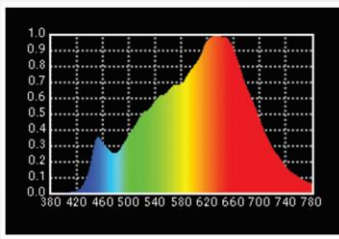

3200K

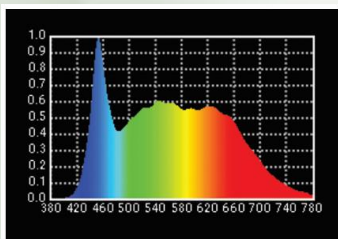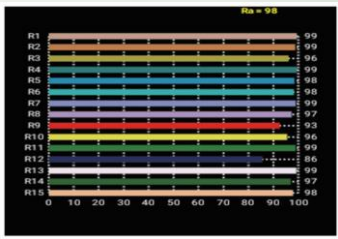

5600K

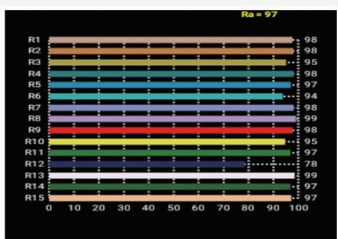

Features


Lamp Source




CC Temp.



Beam Angle



DMX Channels



Consumption



Control




Power / DMX



CRI Value



Photometry Readings

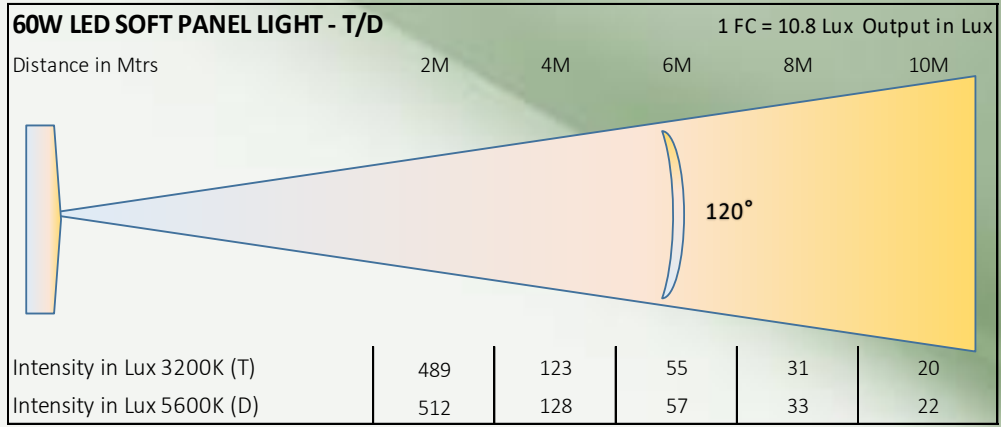

Available Models:

- LK P60S T (Tungsten)
- LK P60S D (Daylight)


Fixture Images



View-1



View-2



View-3



View-4