

**Product Model No.** : LEKSUN 543BC  
**Product Description** : LED Par 3200K ~ 5600K

LED PAR 3200K ~ 5600K

High Quality Bright LED Par Light with 3200K ~ 5600K Color source, High throw, precision color output LED Par light made with die casted aluminum housing, dual yoke arrangement suitable to use for Stage Lighting, Tv Studio lighting and indoor architectural illumination giving high CRI, TLCI & R9 values. Light beam angle can be controlled with lens customized for specific use.



Accessories: Barndoor, Safety Chain, C Clamp

### Technical Specifications:

#### Electrical & Power:

- Power Consumption 180W
- Input Voltage AC 110V ~ 240V, 50/60Hz

#### Optical Arrangement:

- Beam Angle - 25°
- Optional Beam Angle - 15° & 45°

#### Lamp Source:

- LED SMD Based Source
- 3200K ~ 5600K - 54 x 3W
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- 50,000 Hours Burning life

#### Physical & Construction:

- Dimension 250x 265x 235mm
- Weight 3.05 Kgs/ 6.7 lbs
- DmX 5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20 Rated
- Aluminium Body
- Single or Dual Yoke Mount
- Black Powder coated finish
- LED Easy View Display

#### Control:

- DmX 512 Through 5 Pin XLR
- 6 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode



#### Others:

- Working Temperature +45° ~ -30°
- Flicker Free for High FPS
- 65dB ~ 130dB Sound sensing capacity



### Stage Effect Illumination

## LED PAR LIGHT – DMX CHANNELS

CH 1 - Dimmer

CH 5 - White

CH 2 – Day Light Dimming

CH 6 - - Color Preset + Sound

CH 3 – Tungsten Dimming

CH 7 – Speed of Presets



### Features


Lamp Source




CC Temp.



Beam Angle



DMX Channels



Power



Control




Power / DMX



CRI Value



### Photometry Readings

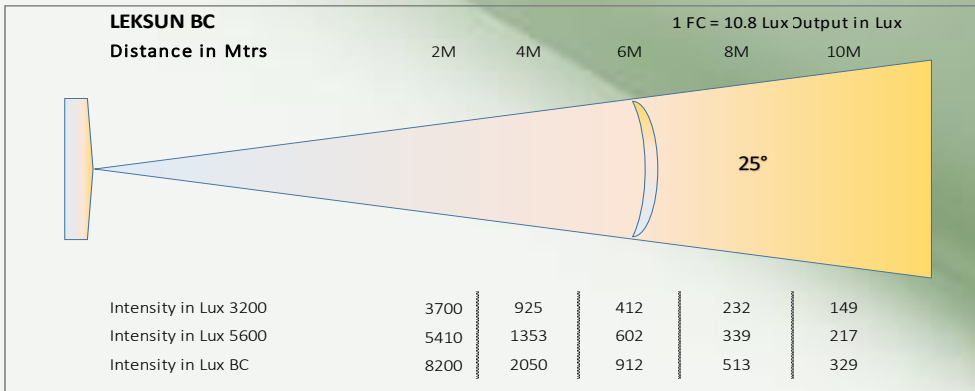

### Available Models:

- LEKSUN 543T
- LEKSUN 543D

### Fixture Images

