

**Product Model No.** : LK PXL 0.5 - 10

**Product Description** : 2W RGBW LED  
PIXEL DOT



Facade Lighting breathes life into unique facades & architecture in private or public spaces. It can also be used to add an artistic feel to the exteriors with shadows, also use up-lighting for pillars and columns to add a simple contrast or to accentuate the object for making it the centre of attraction

## 2W LED PIXEL DOT LIGHT

### Technical Specifications:

#### Electrical & Power:

- Power Consumption : 2W
- Input Power : DC 24V

#### Optical Arrangement:

- Beam Angle : 120°
- Field Angle : 140°

#### Lamp Source:

- LED Source : SMD 5050
- Colour Temperature : RGBW(4 in 1)
- No of LEDs : 5 Nos
- No of Pixels : 1 Nos
- LED Hours Burning life : 50,000


#### Control & Others:

- Control Option : DmX 512 / Auto Mode
- DmX Channels : 4 DmX
- Working Temperature : +55° ~ -30°
- SDCM : < 5
- Power Factor (Min) : 0.9
- Driver/power unit : External Power Supply

#### Physical & Construction:

- Dimension : 50mm
- Ingress Protection : IP66 Rated
- Body Housing : Plastic
- Body Colour : White /Grey/Custom
- Mounting Type : Bracket mount
- Impact Resistance : IK05
- Cooling : Passive Cooling System

#### Dimensions:

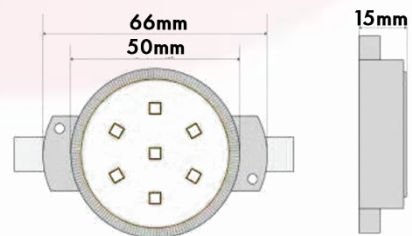


### Features



**2W Power Consumption**



**DMX control**



**SMD Based LEDs**



**Beam angle: 120°**



**Colour Temperature: RGBW**



**IP 66 Water & Dust Resistance**