

**Product Model No.** : LK ZPRO 80 T  
**Product Description** : LED ZOOM PROFILE 80W

### 80W LED ZOOM PROFILE

High Quality Superior Output Long through professional ellipsoidal 80W LED zoom profile light with Zoomable high quality sharp edge optical Lenses to adjust the beam from 25 Degree to 50 Degree suitable for special illumination effects for Auditorium stages, TV production Studios Event Stages and multipurpose venues.

Accessories: Power cord, Gobo Holder, Gobos.



### Technical Specifications:

#### Electrical & Power:

- Power Consumption 80W
- Input Voltage AC 100V ~ 240V, 50/60Hz

#### Optical Arrangement:

- Beam Angle 15° - 30° or 25° - 50°
- High Quality zoomable optical lens system

#### Lamp Source:

- LED COB Based Source 3200K
- Colour Rendering Index 90+
- Tel. Lighting Consistency Index 90+
- R9 Value 90+
- 50,000 Hours Burning life

#### Physical & Construction:

- Dimension 445 x 210 x 140mm
- Weight 4 Kgs/ 8.8 lbs
- DmX 5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP65
- Aluminium Alloy
- Efficient and well designed reflector
- Manually adjustable yoke Mount
- Black/White Powder coated finish
- LCD Easy View Display

#### Control:

- DmX 512 Through 5 Pin XLR
- 1/3 Channel DmX Control
- DMX/RDM/Auto Run/Master Slave & Manual
- 0% to 100% Dimming
- Manual focus with 4 beam shaping cutters



#### Others:

- Working Temperature +40° ~ -30°
- Strobe option adjustable 1 ~ 25 times/Sec
- 4 Kinds of Dimming Curves



Gobo





Gobo Holder



### Stage Effect Illumination

### 80W LED ZOOM PROFILE – 3200K

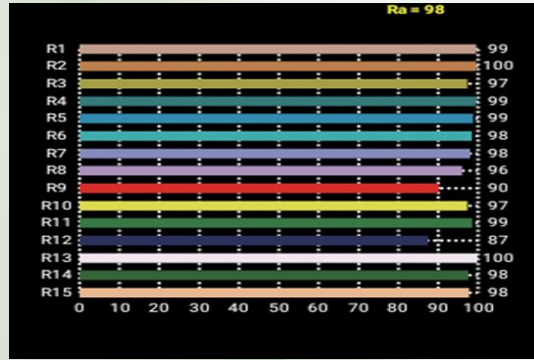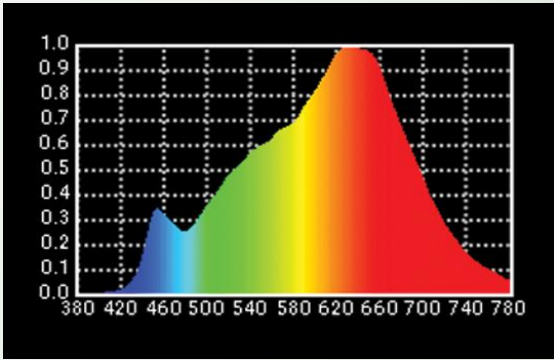

### Features


Lamp Source




CC Temp.



Beam Angle



DMX Channels



Power



Control



Power/DMX



CRI Value



### Photometry Readings

80W LED Zoom Profile

Distance in Mtrs	1M	2M	3M	4M	5M
Intensity In Lux - 3200K (25°)	13960	3490	1552	873	559
Intensity In Lux - 3200K (50°)	4160	1040	463	261	168

1 FC = 10.8 Lux

Output in Lux

- Available Models:
- LK ZPRO 200 T/D
  - LK ZPRO 300 T/D
  - LK ZPRO 300 T/D

### Fixture Images



View-1



View-2



View-3



View-4