

Product Model No. : LK SG 400 T/D
Product Description : 400W LED linear Blinder Light
8X50

SOFT GLO – 400W SC

High bright uniform distributed 50W Each LED Source for illuminating the multipurpose venues, large audience, Auditorium Stages, DJ & Event Stages, Large photographic venues, Production Studios, Discotheques, Film & Band performances for providing flood lighting effect.



Accessories: Safety Chain, C Clamp

Technical Specifications:

Electrical & Power:

- Power Consumption 400W
- Input Voltage AC 100V ~ 240V, 50Hz

Optical Arrangement:

- Beam Angle 25°/ 45°

Lamp Source:

- LED COB Based Source
- 3200K/5800K, 8 x 50W Chip on Board
- Colour Rendering Index 95+
- Tel. Lighting Consistency Index 95+
- R9 Value 90+
- 50,000 Hours Burning life

Physical & Construction:

- Dimension 390x 175x 310mm
- Weight Kgs 8.15 Kgs
- DmX 3/5 Pin In and Out
- Power Loop In and Out
- Ingress Protection IP20
- MS Body with Black Powder coated finish
- LED Easy View Display

Control:

- DmX 512 Through 5 Pin XLR
- 2/6 Channel DmX Control
- Manual Mode Operation
- Sound Active Mode Control
- Master Slave Mode




Others:

- Working Temperature +45° ~ -30°
- Strobe option Adjustable 1~25 times/Sec Variable
- 11.7KHz Refresh Rate




Stage Effect Illumination

400W LED LINEAR BLINDER LIGHT

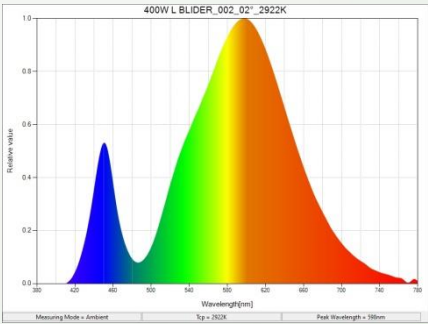

3200K

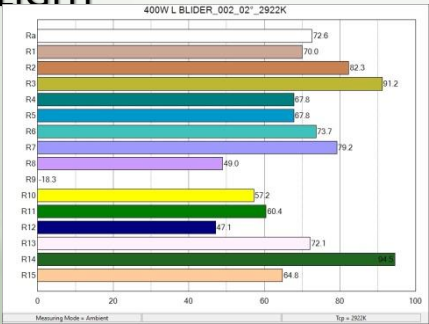

Features

Lamp Source




LED
COB

CC Temp.



3200K/5800K

Beam Angle



25°/45°

DMX Channels



2/6 Ch

Power



400W


Control

DMX
512

Power/DMX



CRI Value



95 +


Photometry Readings

LINEAR BLINDER 400W

Distance in Mtrs

2M 4M 6M 8M 10M

1 FC = 10.8 Lux Output in Lux

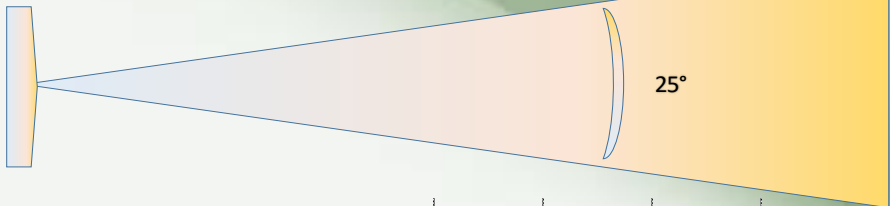

Intensity in Lux 3200K (25°)

32000 8000 3556 2001 1281

Intensity in Lux 5600K (25°)

33684 8421 3743 2106 1348

Available Models:

- LK SG 400T
- LK SG 400D

Fixture Images



View-1



View-2



View-3



View-4